




AUTOMATIC BALANCING HOSE KIT - AHK

JOB NAME:	REP:	DATE:
ENGINEER:	REF/ PO#:	
CONTRACTOR:	SUBMITTED BY:	

SUBMITTAL

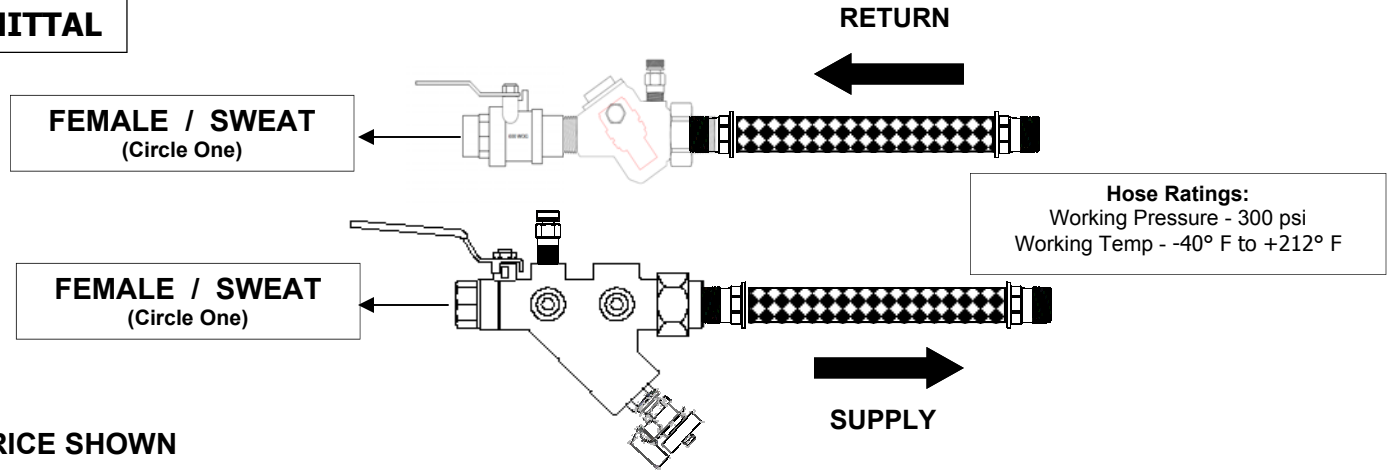

LIST PRICE SHOWN

SIZE	1/2"	3/4"	1"L	1"H	1 1/4"	1 1/2"L	1 1/2"H	2"	Adder with Extended Accessories
GPM	<u>.33 - 12.0</u>	<u>.33 - 12.0</u>	<u>.33 - 12.0</u>	<u>5.0 - 42.0</u>	<u>5.0 - 42.0</u>	<u>5.0 - 42.0</u>	<u>15.0 - 150</u>	<u>15.0 - 150</u>	
12" Length									
18" Length									
24" Length									
30" Length									
36" Length									
Model #'s	AHK112 AHK118 AHK124 AHK130 AHK136	AHK212 AHK218 AHK224 AHK230 AHK236	AHK312L AHK318L AHK324L AHK330L AHK336L	AHK312H AHK318H AHK324H AHK330H AHK336H	AHK412 AHK418 AHK424 AHK430 AHK436	- AHK518L AHK524L AHK530L AHK536L	- AHK518H AHK524H AHK530H AHK536H	- AHK618 AHK624 AHK630 AHK636	

Call for Pricing

DESCRIPTION:

US Industrial Sourcing AHK Automatic Balancing Hose Kit is a packaged and partially preassembled grouping of components required to complete installation of a terminal unit. Temperature Control Valves, piping and coils are supplied "By Others". Mounting and testing of the TCV's is available at an extra expense.

<p>SUPPLY</p>	<p>RETURN</p>	<p>SUPPLY/ RETURN</p>
<p>Model IVY - Integral ball valve, wye strainer and union device rated at 600 WOG. Provides shut off valve and accessory taps for installation of pressure/ temperature port and drain valve.</p>	<p>Model AFLB - The AFLB is an automatic flow limiting device, ball valve by union, rated at 600 WOG. Comes standard with two pressure/ temperature ports and a hanging ID tag for easy commissioning.</p>	<p>HSS - Engineered CPE Tube 1/2" through 1" / EPDM 1 1/4" through 2". Solid brass hex tapered NPT male and integral swivel male NPT termination with stainless steel ferrules 1/2"-1" sizes. Plated steel male NPT 1-1/4" to 2" sizes with plated steel ferrules.</p>